





ROLLS AND CUT PADS

LUFIL PS4525

Width A (mm)
Length B (m)
Thickness C (mm)
Media area (m²)
Flow rate (m³/h) /
Delta P (Pa)

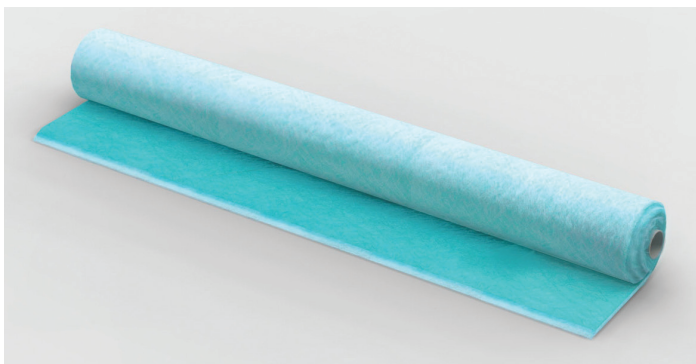

G3 - ISO COARSE 50% ISO 16890					
LUFIL PS4525	2000	20	100	40	6300 / 40



Tip Check the elasticity of the media by dropping, from 1 meter high, a coin. If it correctly bounces, the elasticity is good.

A reinforced layer on clean air side prevents any paint particle to be released.

DGPS

APPLICATIONS

- Paint mist separator in spray booth and coating extract systems
- Primary filtration on gas turbines

ADVANTAGES

- Cutting service
- Progressive density
- High retention power
- Airflow direction set by a double green / white color

GENERAL FEATURES

- Media: Fiberglass
- Recommended final pressure drop: 200 Pa
- Maximum T° in continuous service: 120°C
- Humidity: 100% RH