


Technical data and dimensions 1

Flange opposite duplex filter with switching valves

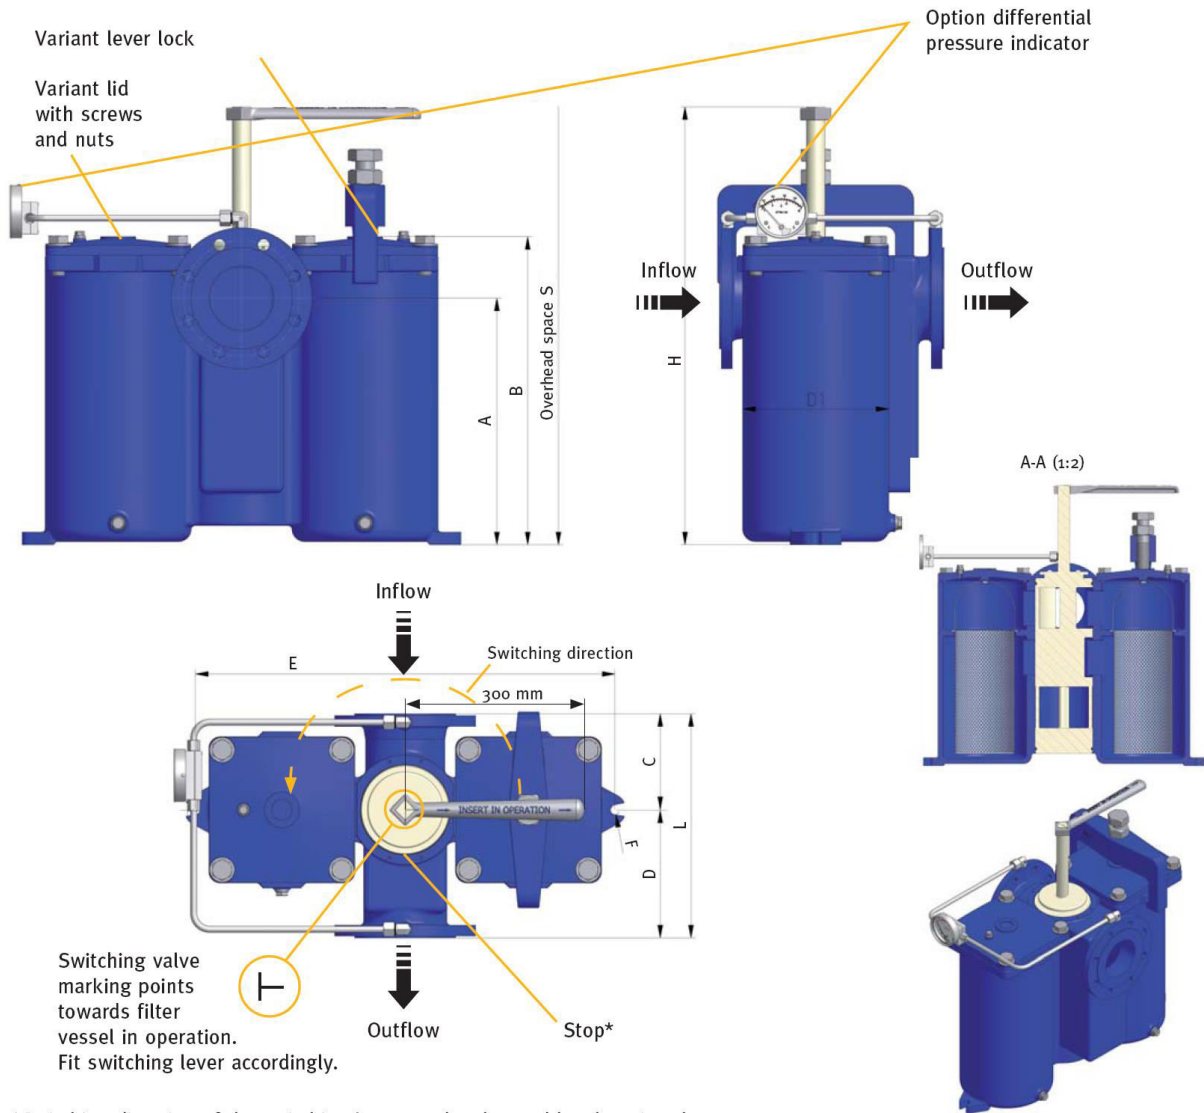

Switching valve marking points towards filter vessel in operation. Fit switching lever accordingly.

*Switching direction of the switching lever can be changed by changing the stop.

Housing-size	Nominal diameter Flange connection	Pressure stage		ØD ₁	A	B	C	D	E	F	S	H	L	Flow rate at 2.5 m/s	Con-tents	Filter area		Weight
		Lock	Screws													Basket strainer	Ring strainer	
	mm	bar	bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	m ³ /h	L	cm ²	cm ²	kg
2	15	16	16	102	183	238	78,5	93,5	290	12	450	362	172	3	1	270	-	21
2	20	16	16	102	183	238	78,5	93,5	290	12	450	362	172	3	1	270	-	22
2	25	16	16	102	183	238	78,5	93,5	290	12	450	362	172	4,5	1	270	-	22
3	32	16	16	127	235	298	97,5	127,5	364	12	550	449	225	7	1,2	440	680	38
3	40	16	16	127	235	298	97,5	127,5	364	12	550	449	225	12	1,2	440	680	38
3	50	16	16	127	235	298	97,5	127,5	364	12	550	449	225	12	1,2	440	680	38
4	50	10	16	168	267	338	120,5	162,5	504	12	650	480	283	18	3,5	740	1200	69
4	65	10	16	168	267	338	120,5	162,5	504	12	650	480	283	30	3,5	740	1200	70
6	80	10	16	228	385	478	170	210	655	14	900	695	380	45	9	1350	2200	175
6	100	10	16	228	385	478	170	210	655	14	900	695	380	70	9	1350	2200	175
6	125	10	16	228	385	478	170	210	655	14	900	695	380	70	9	1350	2200	175