

# LUFIL FILTER ROLLS

## APPLICATIONS



- Primary filtration for air treatment in ventilation and air conditioning

## ADVANTAGES

- Low pressure drop
- Mechanical resistance
- Progressive density
- High retention power

## GENERAL FEATURES

- Efficiency EN779: G2-G4
- Media: Synthetic
- Final pressure drop: 250 Pa
- Maximum T° in continuous service: 110°C
- Humidity: 100% RH

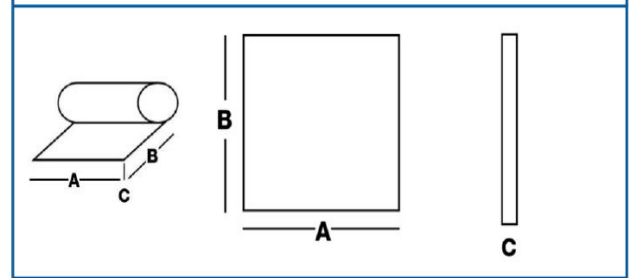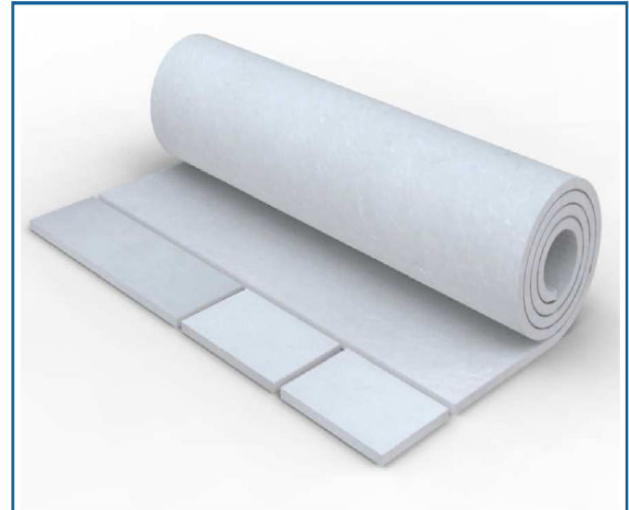

### TIP :

The organic media structure allows a more important dust retention capacity.



Description	Efficiency EN779	Width (mm) A	Lenght (m) B	Thickness (mm) C	Media area (m <sup>2</sup> )	Flow rate (m <sup>3</sup> /h)	Delta P (Pa)
<b>POLY 500</b>	<b>G4</b>	<b>490</b>	<b>615</b>	<b>22</b>	<b>0.30</b>	<b>5400</b>	<b>76</b>
<b>POLY 500</b>	<b>G4</b>	<b>555</b>	<b>615</b>	<b>22</b>	<b>0.34</b>	<b>5400</b>	<b>76</b>